

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

Strength graded structural timber with rectangular cross section

according to the product specification listed in the current addendum to this certificate placed on the market by

Company

SÄGEWERK MEISSNITZER E. U.

Niedernsillerstraße 2

AT-5722 Niedernsill

and produced in the manufacturing plant

AT-5722 Niedernsill, Niedernsillerstraße 2

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14081-1:2005 + A1:2011

under system 2+ are applied and that the factory production control is assessed to be in conformity with the applicable requirements.

CERTIFICATE OF CONFORMITY OF THE FACTORY PRODUCTION CONTROL

Certificate number: 1359-CPR-0753

Date of first issue: 03.04.2018


Date of issuance: 03.04.2018

This certificate will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforchung.at.



Dr. Michael Golser
Authorised signatory

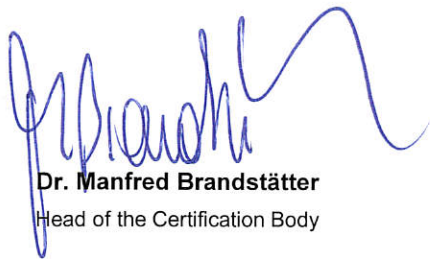

Dr. Manfred Brandstätter
Head of the Certification Body

Addendum to certificate 1359-CPR-0753

Date of issuance: 03.04.2018

Scope of certification:

Strength graded timber for structural applications according to classification of EN 1912

Wood species	Origin	Grading standard	Grading classes	Strength classes according to EN 338
PCAB – Picea abies Spruce	AT, DE	ÖNORM DIN 4074-1	S7, S10, S13	C18, C24, C30
			S7K, S10K, S13K	C18, C24, C30
ABAL – Abies alba Fir	AT, DE	ÖNORM DIN 4074-1	S7, S10, S13	C18, C24, C30
			S7K, S10K, S13K	C18, C24, C30
LADC – Larix decidua Larch	AT, DE	ÖNORM DIN 4074-1	S7, S10, S13	C18, C24, C30
			S7K, S10K, S13K	C18, C24, C30
<u>Combination</u>				
WPCA – Spruce, Fir	AT, DE	ÖNORM DIN 4074-1	S7, S10, S13	C18, C24, C30
			S7K, S10K, S13K	C18, C24, C30

Additional mandated performances:

Fire behaviour:

D-s2, d0

Durability
(without wood preservative treatment):

according to EN 350-2